
## **Freezing and Thawing Tester**

This is tester to test building inside constructions, and protected the surface constructions by tile or terracotta, and almost no effected constructions from the freezing fusion.



## **CO<sub>2</sub> Carbonation Test Chamber**

This chamber is used to input CO<sub>2</sub> gas into constant temperature humidity room with control for concrete neutralization test.

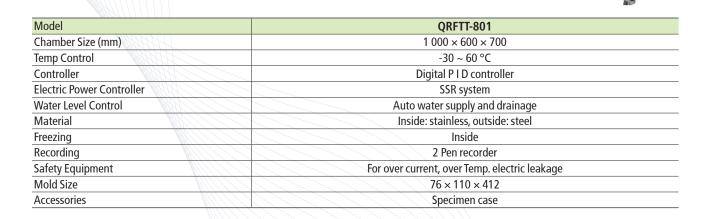

Model	QRCO2-801	QRCO2-802
Chamber Size (mm)	$600 \times 600 \times 800$	$600 \times 600 \times 800$
Temp. Control	-20 ~ 150 °C	-20 ~ 150 °C
Controller	Digital PID controller	Digital PID touch controller
Control Range	0 ~ 20 %	
Control Type	Solenoid valve	
Power	220 V, 8 kW	
Accessories	Shelves 3 ea	
Weight (kg)	600	