

## Drawing Tester

This tester measure adhesion after scratch by metal pin.



Model	QRDT-501
Load	100 ~ 2 000 kgf
Needle	Ø3 × 23 mm, 60°
Rotation Radius	Ø10
Sample Table	100 × 100 mm
Movement Range	150 mm

## Adjustable Applicator


This device can control coating thickness by 10 $\mu$ m



Model	QRAA-501
Coating Width	100, 150, 200, 250, 300 mm
Coating Thickness	0 ~ 8 mm (10 $\mu$ m)
Material	Aluminum, SUS

## Baker Applicator

This devise is able to adjust coating thickness by 12steps.

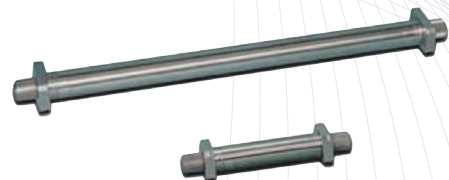

Model	QRBA-501
Coating Width	75, 100, 150, 200, 250, 300 mm
Coating Thickness	0 ~ 250 $\mu$ m (25 $\mu$ m)
Material	SUS 304
Option	0 ~ 125, 0 ~ 500, 250 ~ 500 $\mu$ m